

**KLEIN**

Self closing door

**UNIKSELF®**

Single Sliding Glass Door  
Puerta Corredera de Vidrio Única



UNIKSELF®



UNIKSELF®

**ENG**

Unikself® is designed to divide rooms through the use of a barn door frameless glass door featuring a self-closing mechanism.

- Ideal for bathroom, bedroom or kitchen entrances, office fronts, laboratories, etc.
- Minimalist design with a compact clear anodized track holding panels up to 10' high.
- Innovative application allowing 8 different speed settings and improving drastically the typical soft closing systems.
- Clipped valance for a quick installation.
- Clear opening free of floor tracks.
- Minimal gap between the door and the wall to enhance aesthetic and acoustical features.
- Glass panels held through high weight capacity pressure clamps with no glass drillings (use of tempered or laminated glass) for doors up to 4'-7".
- Pre-mounted and pre-tensioned belt for a quicker and easier assembly.
- Use of 3/8" and 1/2" glass doors.
- Clear anodized aluminium finish.
- Ball bearing system for quiet and soft opening.
- Wall mounted.


Systems tested up to 100.000 cycles as per European standard EN1527.




**ESP**

Unikself® está diseñado para reemplazar cualquier puerta batiente tradicional por un panel de vidrio corredero con autocierre "self closing".



- Ideal para separación de baños, cocinas, oficinas, laboratorios...
- Sistema con diseño moderno para obras contemporáneas.
- Sistema de autocierre avanzado con 8 velocidades regulables.
- Galería clipada para una instalación rápida.
- Zona de paso limpia sin riel en el suelo.
- Mínima separación entre vidrio y pared garantiza una aplicación más estética.
- Sujeción de la puerta mediante mordazas a presión sin mecanización del cristal (vidrio templado o laminado).
- Sistema de transmisión premontado y pretensado para un montaje rápido.
- Vidrio de 3/8" o 1/2".
- Perfil de aluminio anodizado "Silver" (AA10 ISO 7599, 10 micras).
- Rodamientos de bolas para apertura suave.
- Instalación a pared.

Sistemas testados hasta 100.000 ciclos según la norma EN1527.

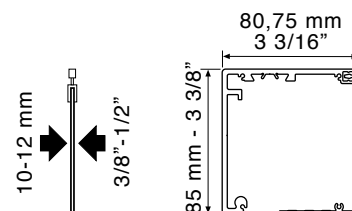**UNIKSELF®**

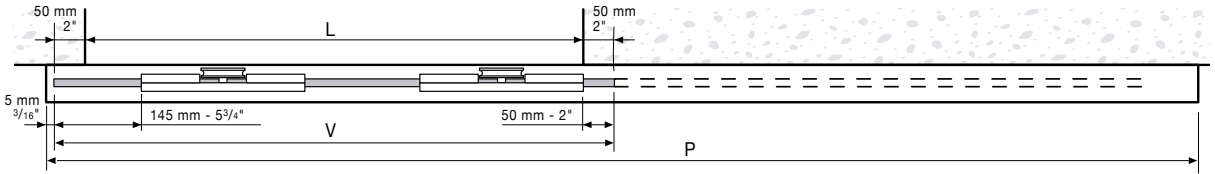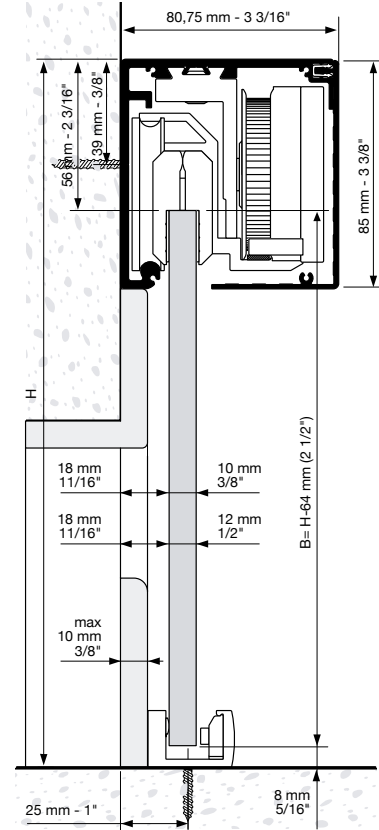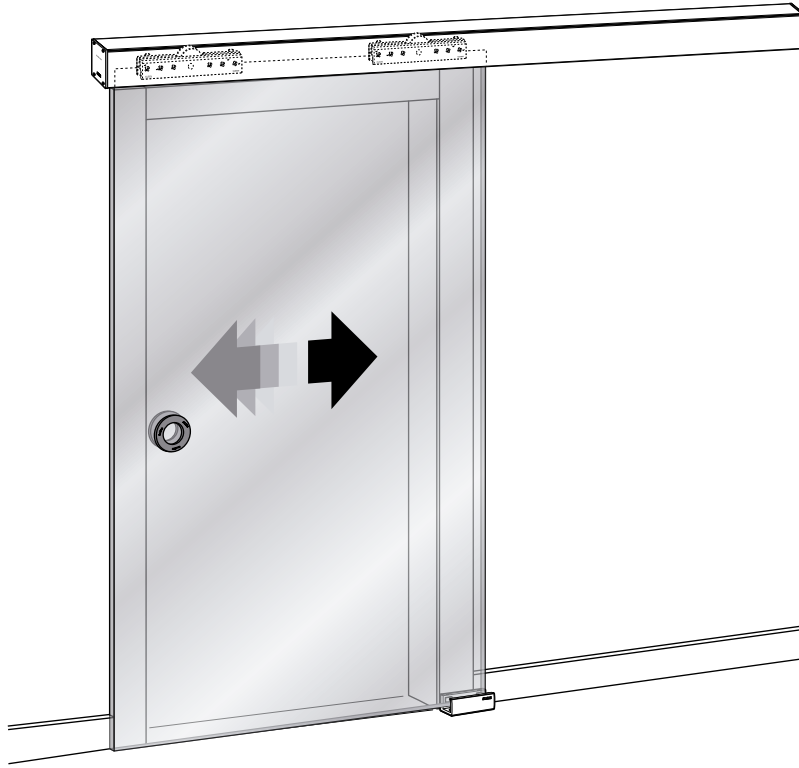

	L	V	P0	P
<b>G1 V10 - V12</b>	900 mm - 1.150 mm 35 1/2" - 45"	L + 100 mm	2.500 mm 98"	2L + 160 mm
<b>G2 V10</b>	1.150 mm - 1.500 mm 45" - 59"	L + 4"	3.000 mm 118"	2L + 6 5/16"

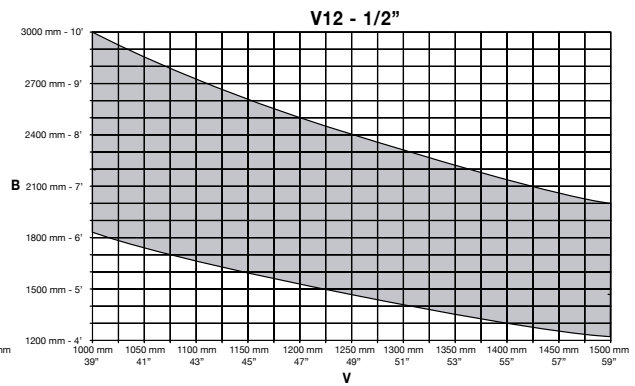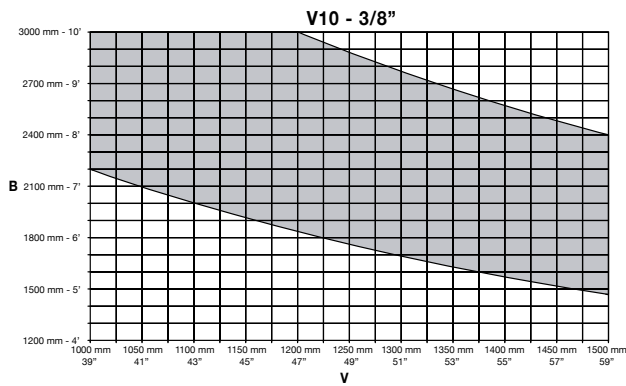

Dimensions that are in mm are exact; those in inches are approximate.

## REFERENCES / REFERENCIAS

## ENG


UNIKSELF®		
Ref.	Description	Img.
8101	KIT G1 UNIKSELF 98" TRACK, RIGHT HAND (3/8" GLASS)	A
8103	KIT G1 UNIKSELF 98" TRACK, RIGHT HAND (1/2" GLASS)	A
8105	KIT G1 UNIKSELF 98" TRACK, LEFT HAND (3/8" GLASS)	A
8107	KIT G1 UNIKSELF 98" TRACK, LEFT HAND (1/2" GLASS)	A


## ESP

UNIKSELF®		
Ref.	Descripción	Img.
8101	KIT G1 UNIKSELF PERFIL 98", APERTURA DERECHA (VIDRIO 3/8")	A
8103	KIT G1 UNIKSELF PERFIL 98", APERTURA DERECHA (VIDRIO 1/2")	A
8105	KIT G1 UNIKSELF PERFIL 98", APERTURA IZQUIERDA (VIDRIO 3/8")	A
8107	KIT G1 UNIKSELF PERFIL 98", APERTURA IZQUIERDA (VIDRIO 1/2")	A



A

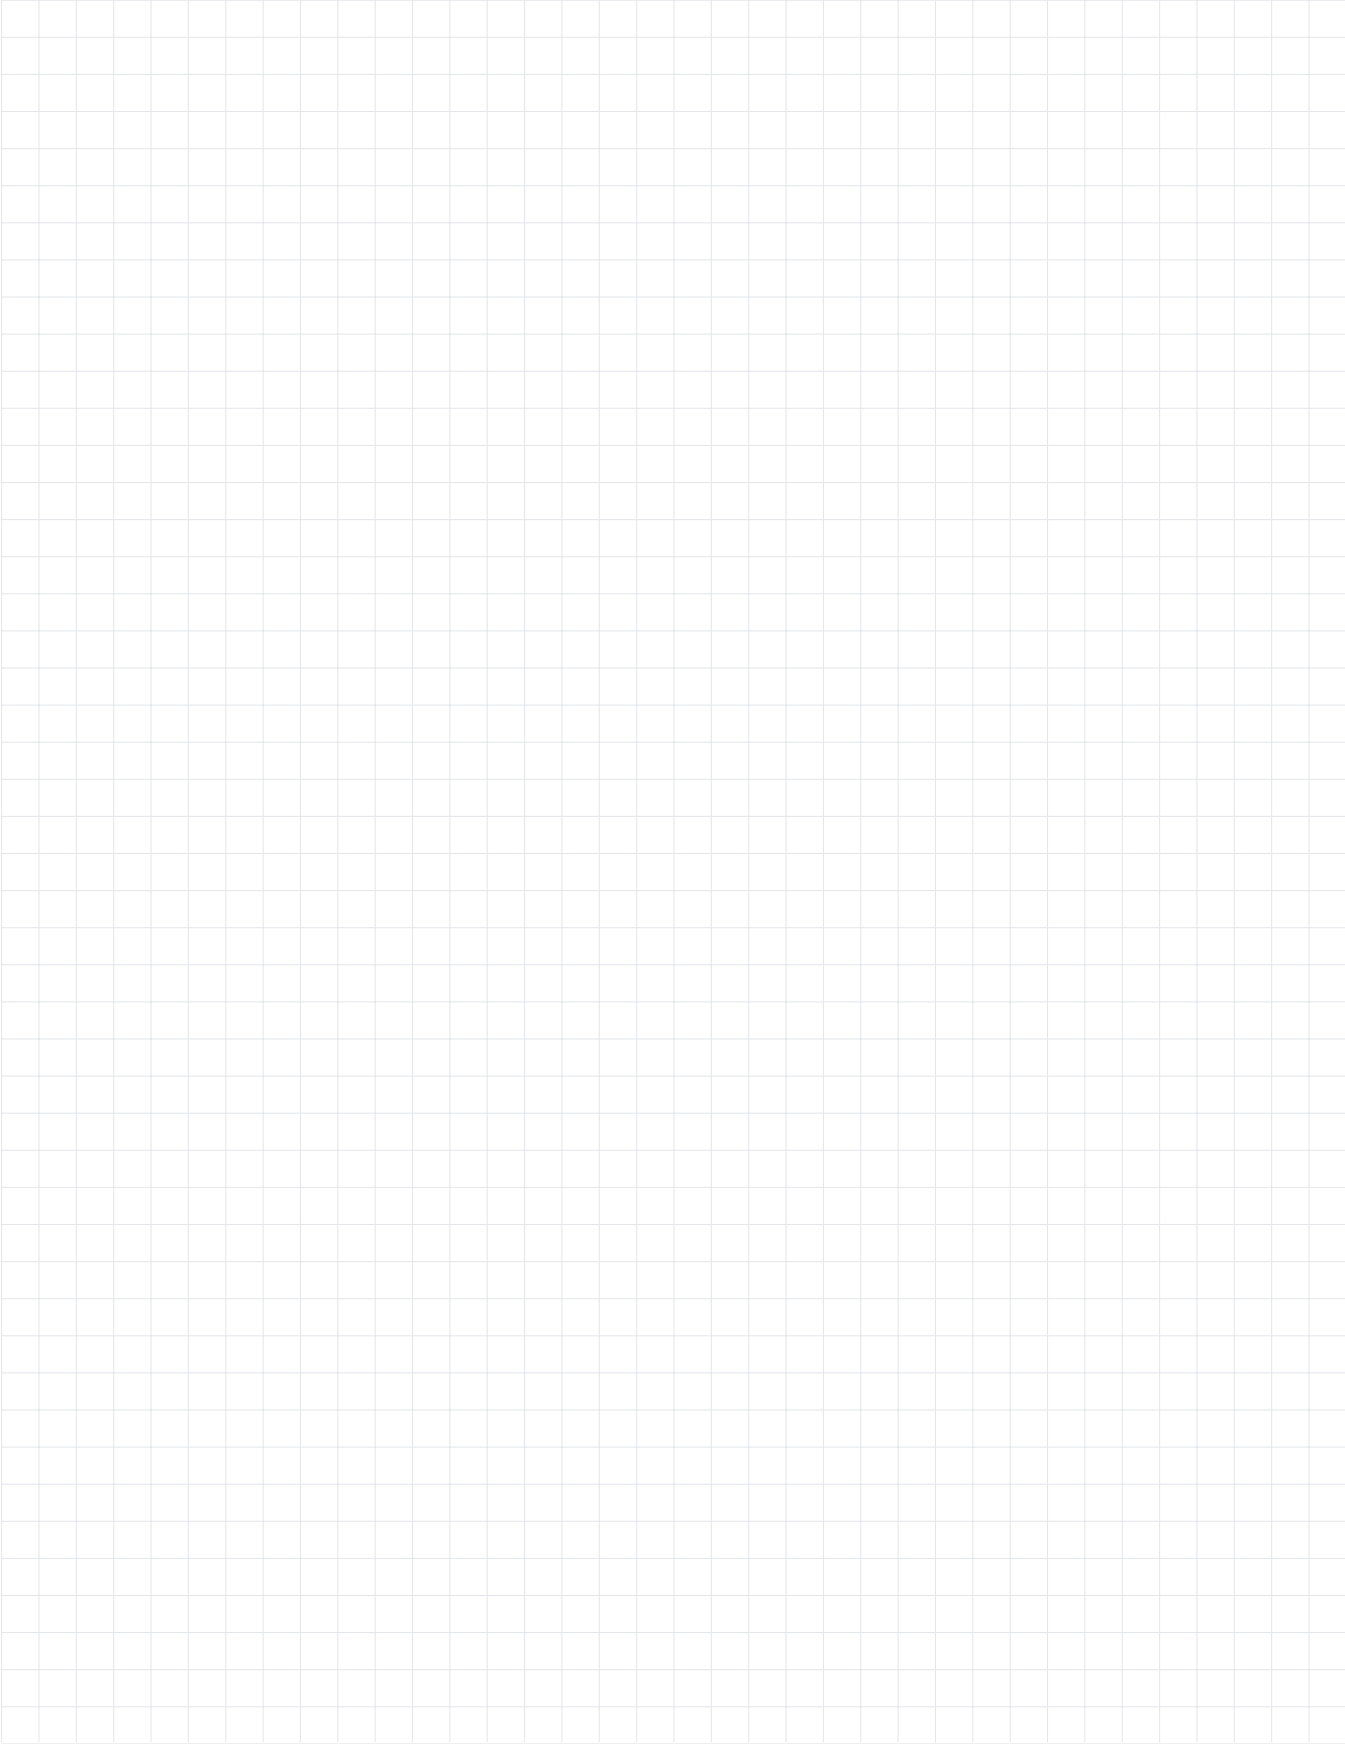

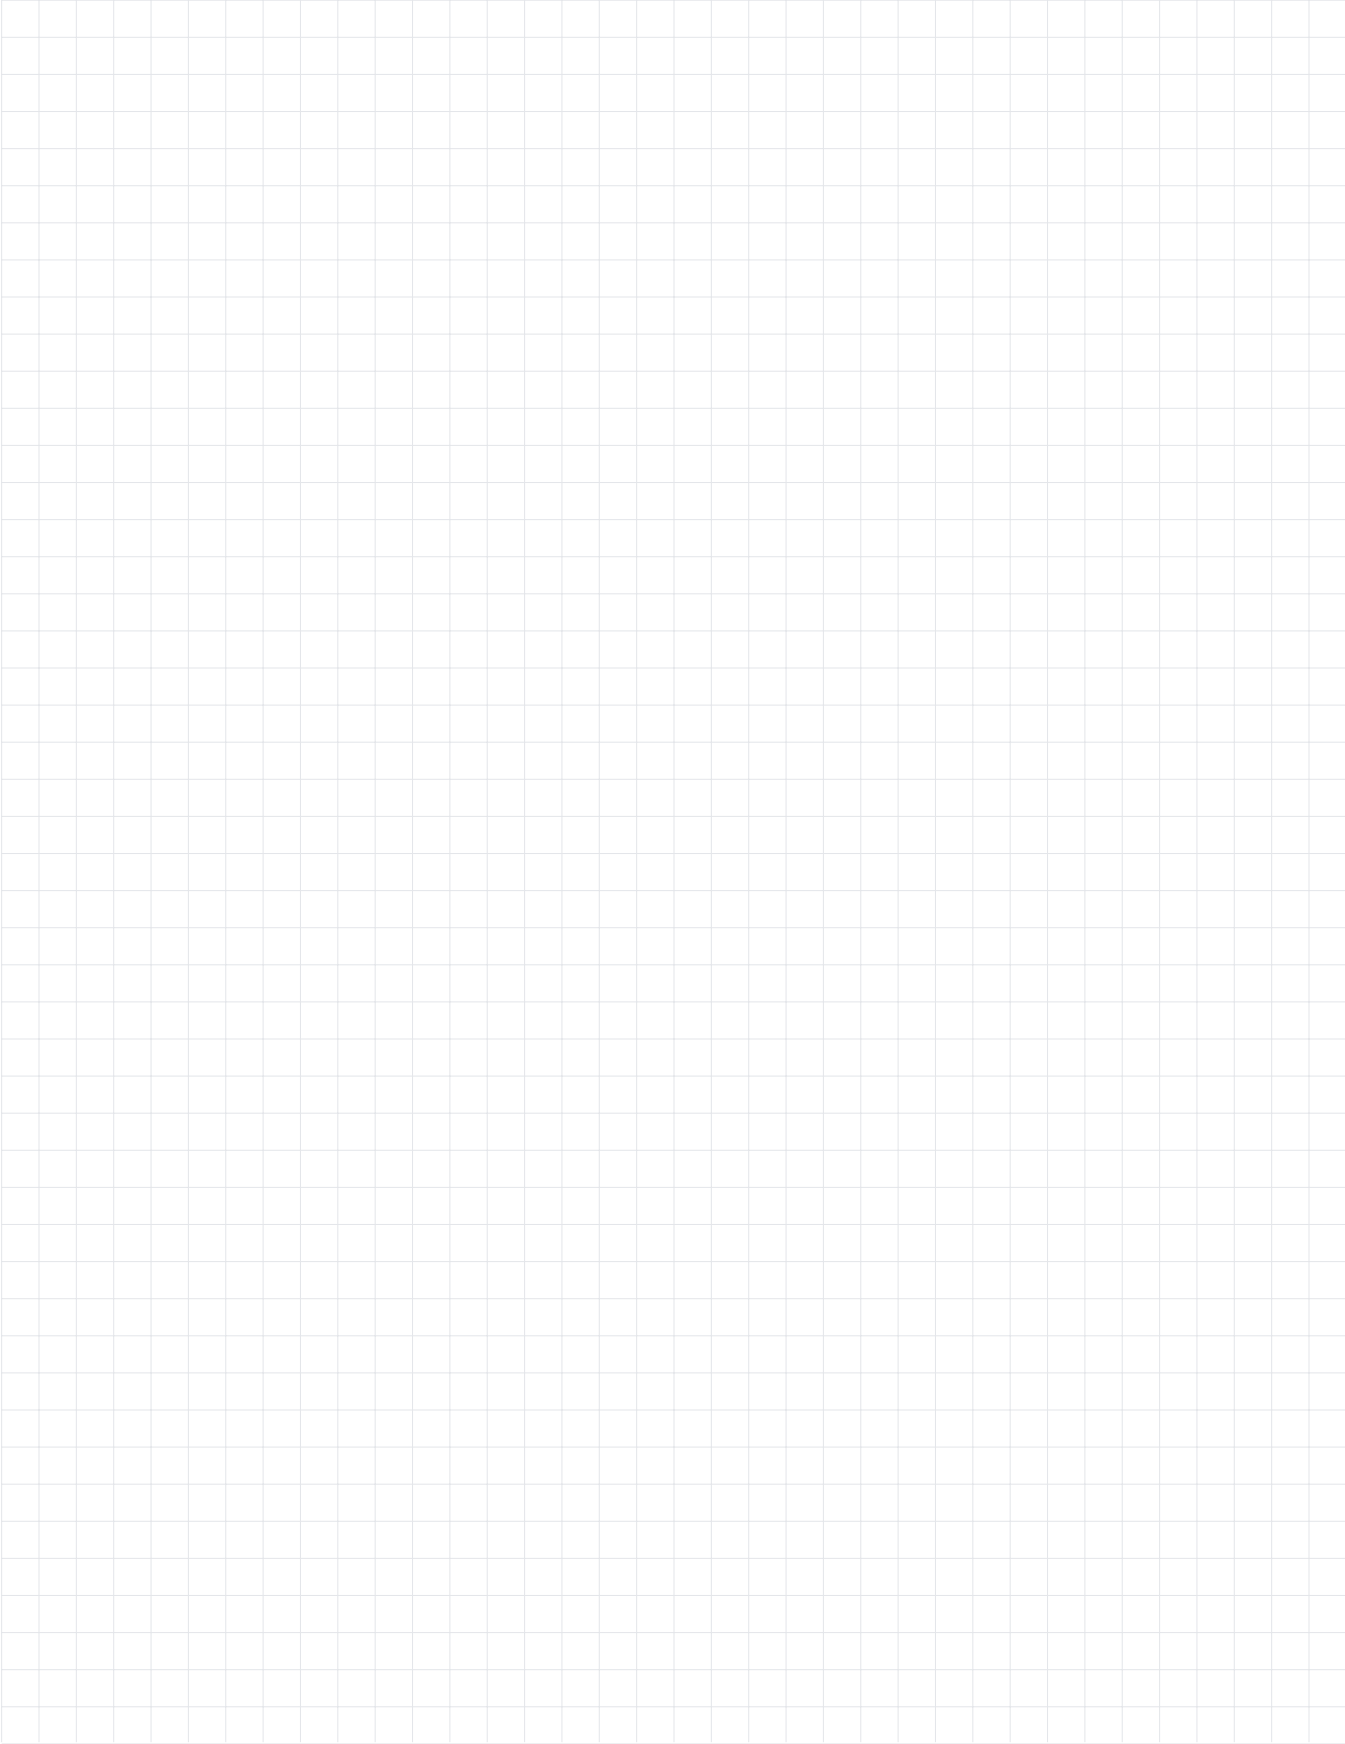

# KLEIN

**KLEIN USA, Inc.®**  
1 Madison Street  
East Rutherford, NJ 07073

Phone: 973 246 8181  
Fax: 973 246 8362  
info@klein-usa.com  
[www.klein-usa.com](http://www.klein-usa.com)

Follow us on social media  
Síguenos en redes

